


# Indirect Base Up (IBU) Lighting

with HID remote ballast

The IBU lights a facility evenly from ceiling to floor, this unique one-piece base up fixture eliminates annoying glare and shadows. Its dynamic shape reflects light at specific angles producing more light at floor levels. Ideal for lighting sports, retail, manufacturing, commercial, and industrial facilities with white ceiling heights from 12-50 feet.

**Description:** Indirect aluminum fixture pre-wired and assembled for Metal Halide Base up lamps. Indirect opening 25" diameter with a 30 degree smooth reflecting inner surface and a 5" deep by 9" diameter bottom neck for precise bulb placement. Fixture Painted: high temperature polyester powder coating; gloss white. Includes pendent and 4" ball box cover.



## Ordering Information

example: MH-IBU PM8 1000 MT 277 LI



### MH-IBU


Fixture Type	Length	Pendent Length	Wattage	Item Number	Remote Ballast Options
	4'	PM4	250	250	MT
	6'	PM6	400	400	Multi-tap
	8'	PM8	750	750	480 Volt
			1000	1000	480
			XXX	XXX	P
				Other (specify)	Indoor enclosed ballast - Potted
					Indoor enclosed ballast - Non-Potted
					NP

Voltage	Other Options:
120	QR
208	Lamp Included
240	LI
277	PS
347	WG
480	

**Fixture Warranty**

Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.

**Photometrics Test (1,000 Watt)**  
Light between 90° and 120° is proven non-reflective and does not produce any light at floor levels.

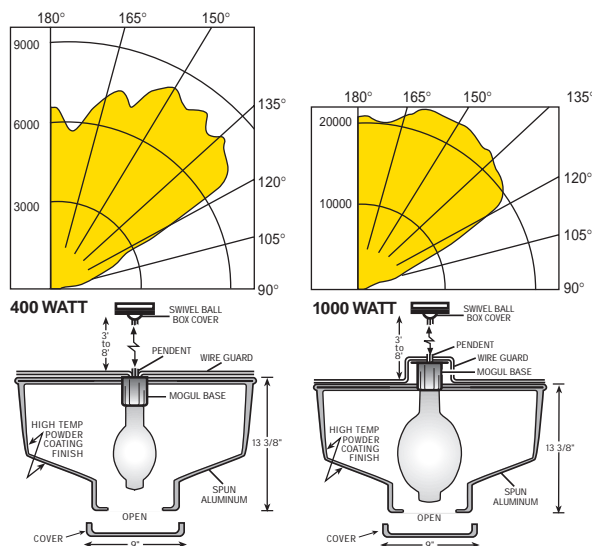

IES Files upon request



Brilliant Energy Saving Technology

100 Park, Troy, MI 48083  
Fax (248) 589-0134

PHONE (248) 588-4980  
TOLL FREE (800) 545-2928

- Test Facility: Independent Testing Laboratories, Inc.
- Test Numbers: ITL46917
- Lamp: 400-watt metal halide, base up, 40,000 lumens
- Test Facility: Independent Testing Laboratories, Inc.
- Test Numbers: ITL46918
- Lamp: 1000-watt metal halide, base up, 115,000 lumens