


BEST Lights MH-XL-HPP Patent Pending

Specifications for MH-XL-HPP:

Fixture outer housing 27" x 27" x 17" high with side radius to a 7" x 27" trough. 16 gage (Steel, Stainless Steel or Aluminum) powder coated. Fixture vented at both ends of trough for air flow. IES File Segmented reflector efficiency 93.2%. Pulse Start ballast and 6kv lamp holder assembly are fastened to inside of fixture. Two 3/32 cable assemblies attached to fixture for hanging from ceiling. Locking plug on 14 gage wire attached to one side of 3/32 cable from fixture to outlet box. Lamp Wattage ___ Ballast Volt ___ Plug Amps ___ Five year warranty on housing & reflector. Weight: Steel 80 lbs., Stainless Steel 85 lbs. & Aluminum 65 lbs.)

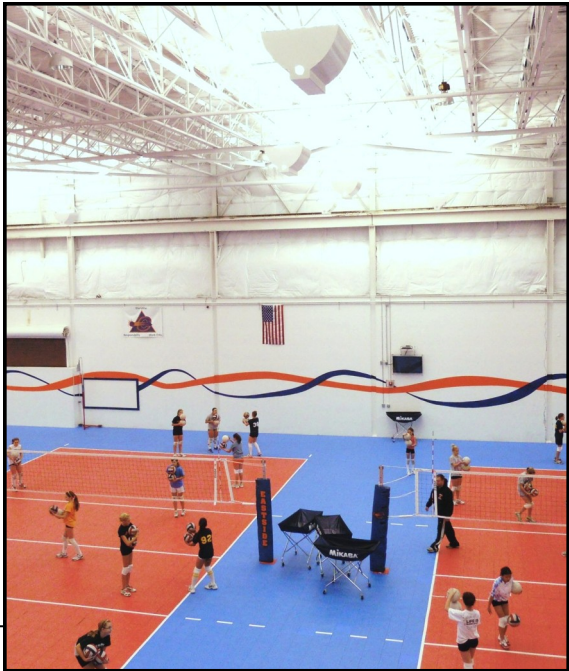


Indirect 65 Foot-Candles everywhere!

Ordering Information:

example: MH-XL-HPP 875/MT/ST/WG/LI/HK6

MH-XL-HPP	Lamp		Voltage		Fixture Body		Whip & Plug		Options	
350	350 W	Multi-Tap	MT	Steel	ST	6'	W6	Pulse Start	PS	
400	400W	120/208		Stainless Steel	SS	9'	W9	Lamp Included	LI	
450	450W	240/277	347	Aluminum	AL	12	W12	Wire Guard	WG	
775	775W		480			20	W20			
875	875W					15 Amp 125V	L5-15P	Glass Lens	GL	
1000	1000W					15 Amp 277V	L7-15P			
						20 Amp 347V	L3723	Hanging Kit	HK	
						20 Amp 480V	L8-20P			6'
									8'	
									10'	
									12'	

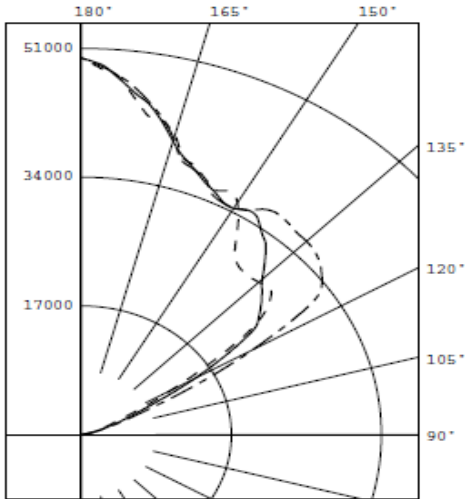

Test: ITL Photometric 1000 watt



BEST LIGHTS, INC.

100 PARK STREET TROY, MI 48083
(800) 545-2928 (248) 588-4980