

BEST Lights MH-XL-HPP Patent Pending

Specifications for MH-XL-HPP:


Fixture outer housing 27" x 27" x 17" high with side radius to a 7" x 27" trough. 16 gage (Steel, Stainless Steel or Aluminum) powder coated. Fixture vented at both ends of trough for air flow. IES File Segmented reflector efficiency 93.2%. Maximum light output at 180% per IES File. Pulse Start ballast and 6kv lamp holder assembly are fastened to inside of fixture. Two 3/32 cable assemblies attached to fixture for easy hanging. Prewired locking plug on 14 gage wire attached to one side of 3/32 cable from fixture to outlet box. Lamp Wattage ___ Ballast Volt ___ Plug Amps ___ Five year warranty on housing & reflector.



Ordering Information:

example: MH-XL-HPP 875/MT/ST/WG/LI/HK6

| MH-XL-HPP | Lamp | | Voltage | | Fixture Body | | Whip & Plug | | Options | |
|-----------|-------|-----------|---------|-----------------|--------------|-------------|-------------|---------------|------------------------|--|
| 350 | 350 W | Multi-Tap | MT | Steel | ST | 6' | W6 | Pulse Start | PS | |
| 400 | 400W | 120/208 | | Stainless Steel | SS | 9' | W9 | Lamp Included | LI | |
| 450 | 450W | 240/277 | 347 | | | 12 | W12 | Wire Guard | WG | |
| 875 | 875W | | 480 | Aluminum | AL | 20 | W20 | | | |
| 775 | 775W | | | | | 15 Amp 125V | L5-15P | Glass Lens | GL | |
| 1000 | 1000W | | | | | 15 Amp 277V | L7-15P | | | |
| | | | | | | 20 Amp 347V | L3723 | Hanging Kit | HK | |
| | | | | | | 20 Amp 480V | L8-20P | | 6' 8' 10' 12' | |

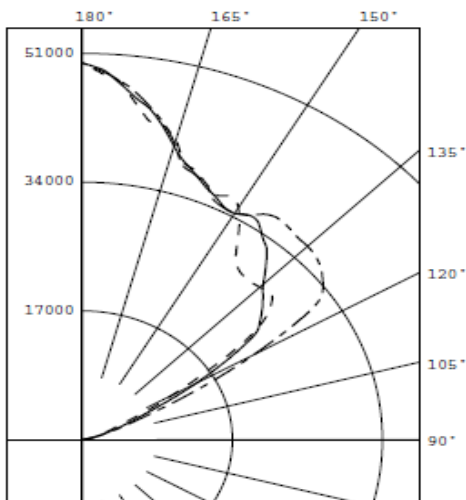

Test: ITL Photometric 1000 watt



BEST LIGHTS, INC.

100 PARK STREET TROY, MI 48083
(800) 545-2928 (248) 588-4980