
SPEC SHEET



## **DISC LED Cable Mount**

The DISC LED Indirect meets all USTA light levels. Our lumen packages are significantly higher than other manufacturers, producing more light with less electricity. Our lights pay for themselves through electrical savings, utility rebates and membership retention. Having the BEST lit facility makes a difference.

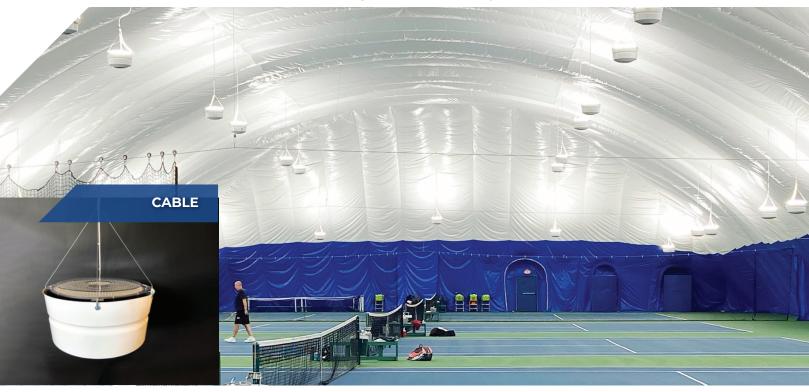

## **TECHNICAL INFORMATION**

Part No. DISC LED

Specify: (Wattage, Voltage & Mounting)

**Input Voltage:** 120-277 or 347-480

**CCT:** 5100 **CRI:** Ra85

Dimmable: PWM 0-10V

Weight: 30 lbs. LED Chip: NICHIA

**DRIVER INVENTRONICS:** Remote Driver available.

NTC: Thermal Sensing and Protection for

**LED Module** 

## 8 - Lights per court = 85 Foot-Candles

**Housing and Heat sink:** Pure Aluminum **Lens:** Clear Polycarbonate Lens (CPL) or Frosted Polycarbonate Lens (FPC)

Working Temperature: -30 to 45Ć

Power Factor: 99.9

Rated for: Damp Locations - NO Fans

Warranty: 10 year

Accessories: Wireless Bluetooth Network Controls: Occupancy Motion Sensors, Dimming, High-end Trim and Scheduling.

Lumen Output: See below.

BEST LIGHTS, INC.		VOLTS				
		120	277	347	480	
INDIRECT -	WATTS	481	473	479	478	
73,471 LUMEN	AMPS	4.01	1.8	1.39	1.05	
INDIRECT -	WATTS	565	552	561	560	
81303 LUMEN	AMPS	4.71	2.08	1.61	1.16	
INDIRECT - FPC	WATTS	481	473	479	478	
62,000 LUMEN	AMPS	4.01	1.8	1.39	1.05	

EXAMPLE:	DISC-LED	I <b>C</b> INDIRECT Cable	72000	120-277V	DIM	OS	LENS
SECTIONS:	SERIES	MOUNTING Option	NOMINAL LIGHT	INPUT VOLTAGE WIRELESS	0-10V	SENSORS	
OPTIONS:	DISC- LED	IC	73,471 LUMENS	120-277V 50/60HZ	DIM-PWM 0-10V	OS	CPL
			81,303 LUMENS	347-480V 50/60HZ	HT-HIGHEND TRIM	DH	
			62,000 LUMENS	277-480V			FPC

