

DISC LED Pendant Mount™




The DISC LED Pendant mount is the perfect for lighting Indoor manufacturing . At 81,303 Lumen's it is the brightest LED illuminating manufacturing facilities with no shadows or glare to higher light levels with fewer watts. Available with Wireless Bluetooth Network Lighting Controls

INDIRECT LIGHTING IS FANTASTIC!

The light bounces everywhere and we see everything when building our equipment including wiring inside control and electrical boxes. With Direct lighting this was not possible.



PENDANT

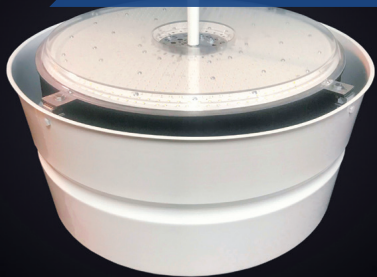

TECHNICAL INFORMATION

- Part No.** DISC LED
- Specify:** (Wattage, Voltage & Mounting)
- Input Voltage:** 120-277 or 347-480
- CCT:** 5100
- CRI:** Ra85
- Dimmable:** PWM 0-10V
- Weight:** 30 lbs.
- LED Chip:** NICHIA
- DRIVER INVENTRONICS:** Remote Driver available.
- NTC:** Thermal Sensing and Protection for LED Module

- Housing and Heat sink:** Pure Aluminum
- Lens:** Clear Safety Glass (CGL) or Frosted Polycarbonate Lens (FPC)
- Working Temperature:** -30 to 45C
- Power Factor:** 99.9
- Rated for:** Damp Locations
- Warranty:** 10 year
- Accessories:** Wireless Bluetooth Network Controls: Occupancy Motion Sensors, Dimming, High-end Trim and Scheduling.
- Lumen Output:** See below.



		VOLTS			
		120	277	347	480
INDIRECT - 73,471 LUMEN	WATTS	481	473	479	478
	AMPS	4.01	1.8	1.39	1.05
INDIRECT - 81303 LUMEN	WATTS	565	552	561	560
	AMPS	4.71	2.08	1.61	1.16
INDIRECT - FPC 62,000 LUMEN	WATTS	481	473	479	478
	AMPS	4.01	1.8	1.39	1.05

EXAMPLE:	DISC-LED	IP INDIRECT PENDANT	72000	120-277V	DIM	OS	LENS
SECTIONS:	SERIES	MOUNTING OPTION	NOMINAL LIGHT	INPUT VOLTAGE WIRELESS	0-10V	SENSORS	
OPTIONS:	DISC-LED	IP	73,471 LUMENS	120-277V 50/60HZ	DIM-PWM 0-10V	OS	CGL
			81,303 LUMENS	347-480V 50/60HZ	HT-HIGHEND TRIM	DH	
			62,000 LUMENS	277-480V			FPC

